


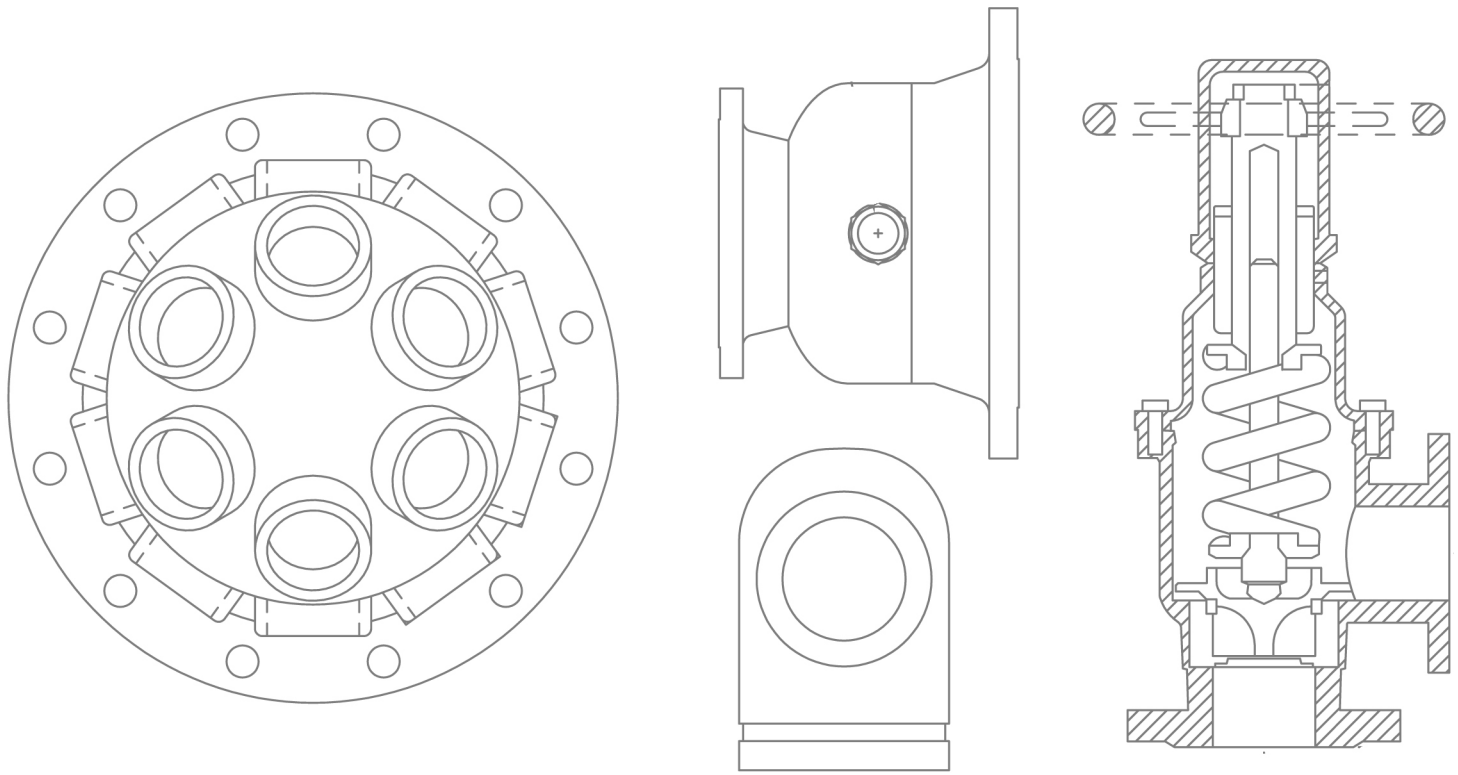

A-C Fire Pump

Fitting and Accessories


A-C 100F

AC FIRE PUMP
a xylem brand

A-C Fire Pump Fitting and Accessories

Table of Content	Page
Automatic Air Release Valve	1
Suction And Discharge Gauge Assembly	2
Casing Relief Valve	3
Casing Relief Valve - R Series	4
Hose Headers, 3X1, 4x2, 6X4, 8X6, 10X12, 12X12, 12X16, 12X20	5-12
Hose Valve Cap & Chain	13
Main Relief Valve - Pilot Controlled	14
Main Relief Valve	15
Closed Waste Cone	16
Gerand Flowmeter	19
GVI Flowmeter	20
Single Wall Fuel Tank	21
Double Wall Fuel Tank	22

AUTOMATIC AIR RELEASE VALVE

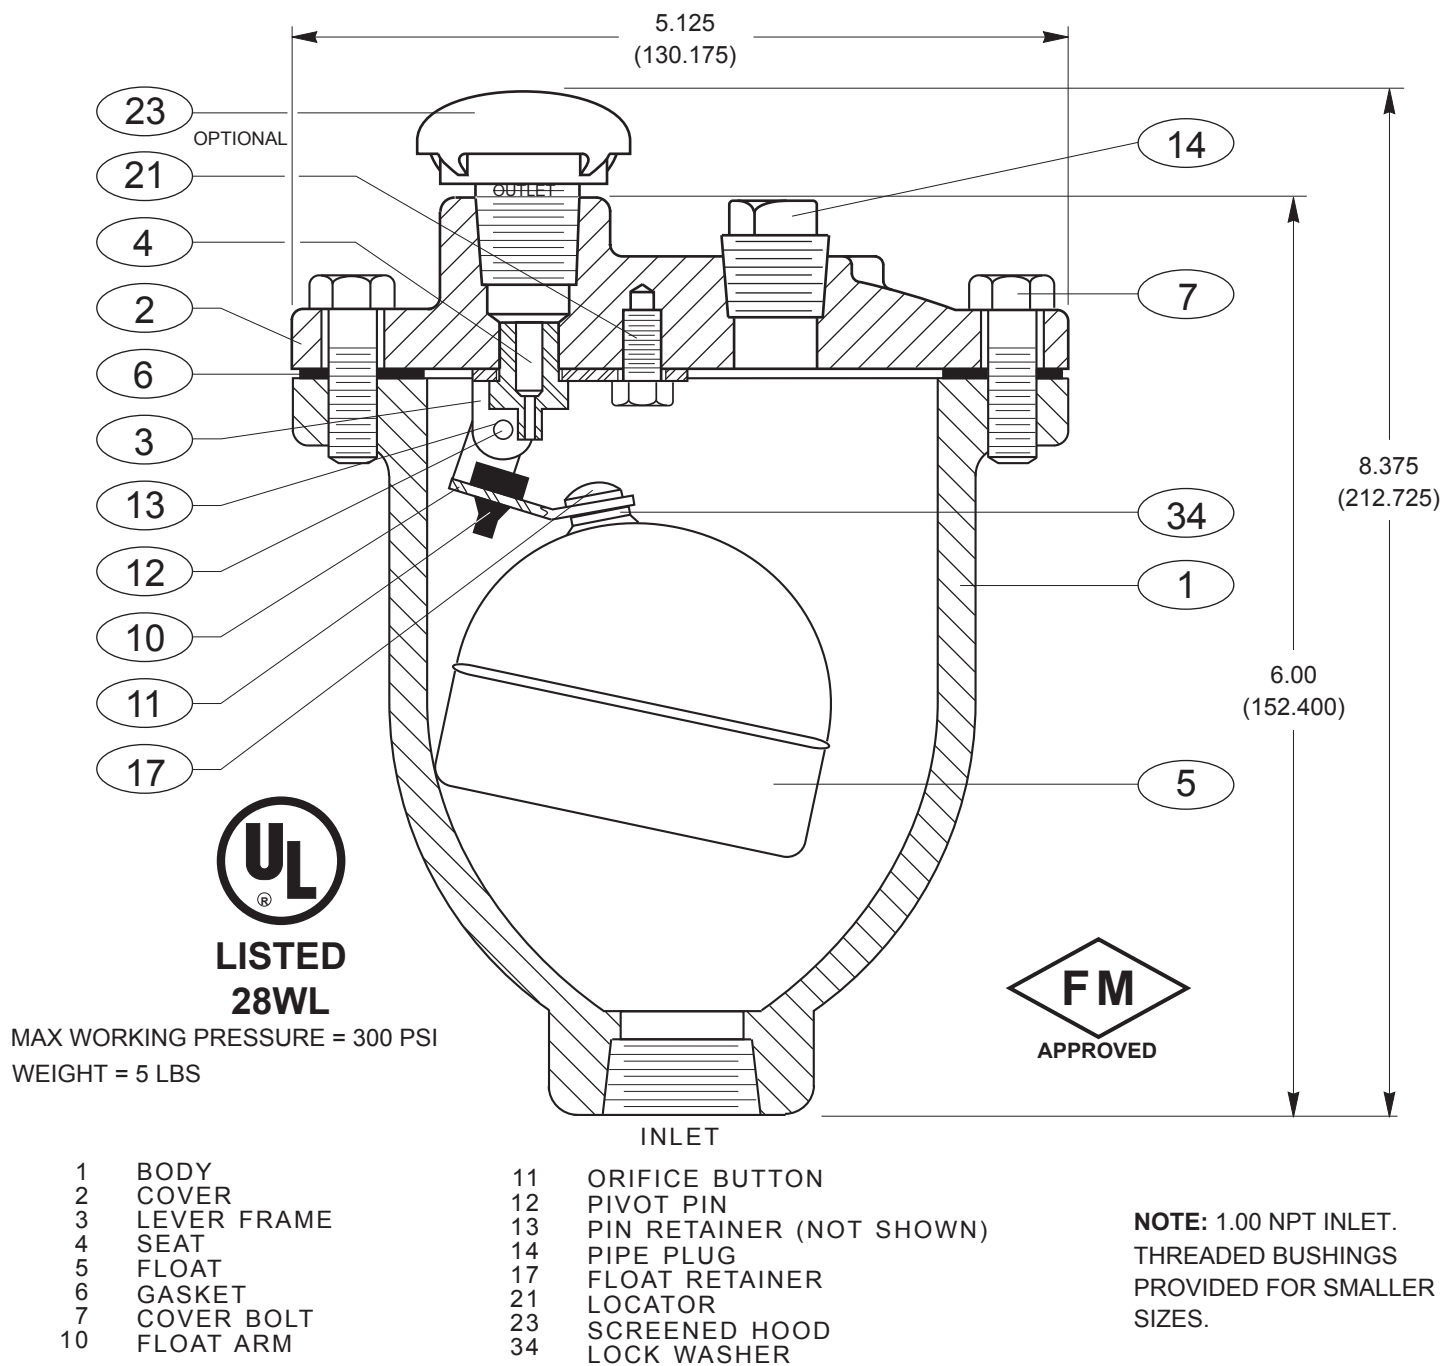

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:





TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

SUCTION AND DISCHARGE GAUGE ASSEMBLY

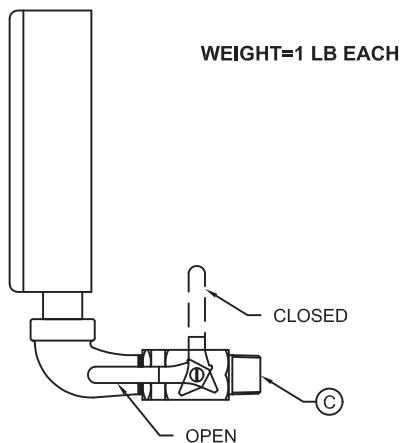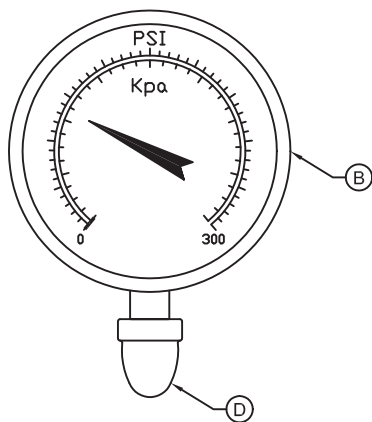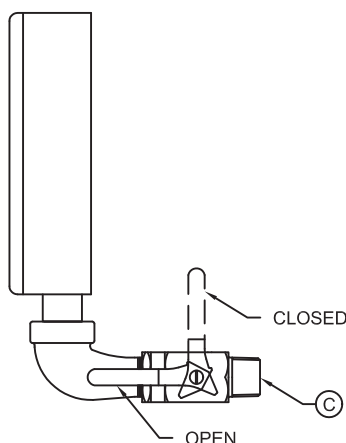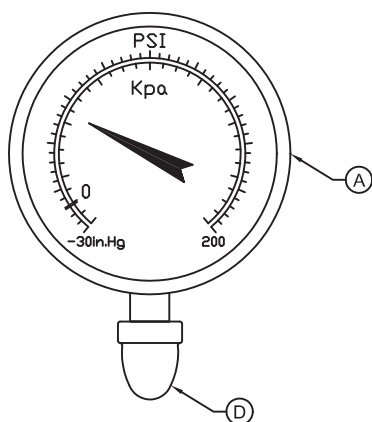

ITEM	DESCRIPTION
A	SUCTION PRESSURE GAUGE, 3.5 DIAL, 3-2-3% ACCURACY, RANGE -30-0-200
B	DISCHARGE PRESSURE GAUGE, 3.5 DIAL, 3-2-3% ACCURACY, RANGE 0-300 PSI
C	1/4" NPT TWO WAY BALL VALVE
D	1/4" NPT STREET ELBOW

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

CASING RELIEF VALVE

Size	3/4" Threaded
Temperature Range	Water, Air: to 180°F Max.
Materials	
Body & Cover:	Cast Bronze ASTM B62 Stainless Steel ASTM A743-CF-16Fa
Trim:	Brass & Stainless Steel 303
Rubber:	Buna-N® Synthetic Rubber

Flow Range: < 2500 GPM


UL Listed 55L Range psi	Approximate Increase for Each Clockwise Turn of Adjusting Screw
20 to 175	28.0 psi

FM Approved 55L Range psi	Approximate Increase for Each Clockwise Turn of Adjusting Screw
0 to 75	8.5 psi
20 to 200	28.0 psi
100 to 300	18.0 psi

Pressure Ratings	Cast Bronze 400 psi Max. Stainless Steel 400 psi Max.
-------------------------	--

Adjustment Ranges	0 to 75 psi 20 to 200 psi 100 to 300 psi
--------------------------	--

WEIGHT = 6 LBS

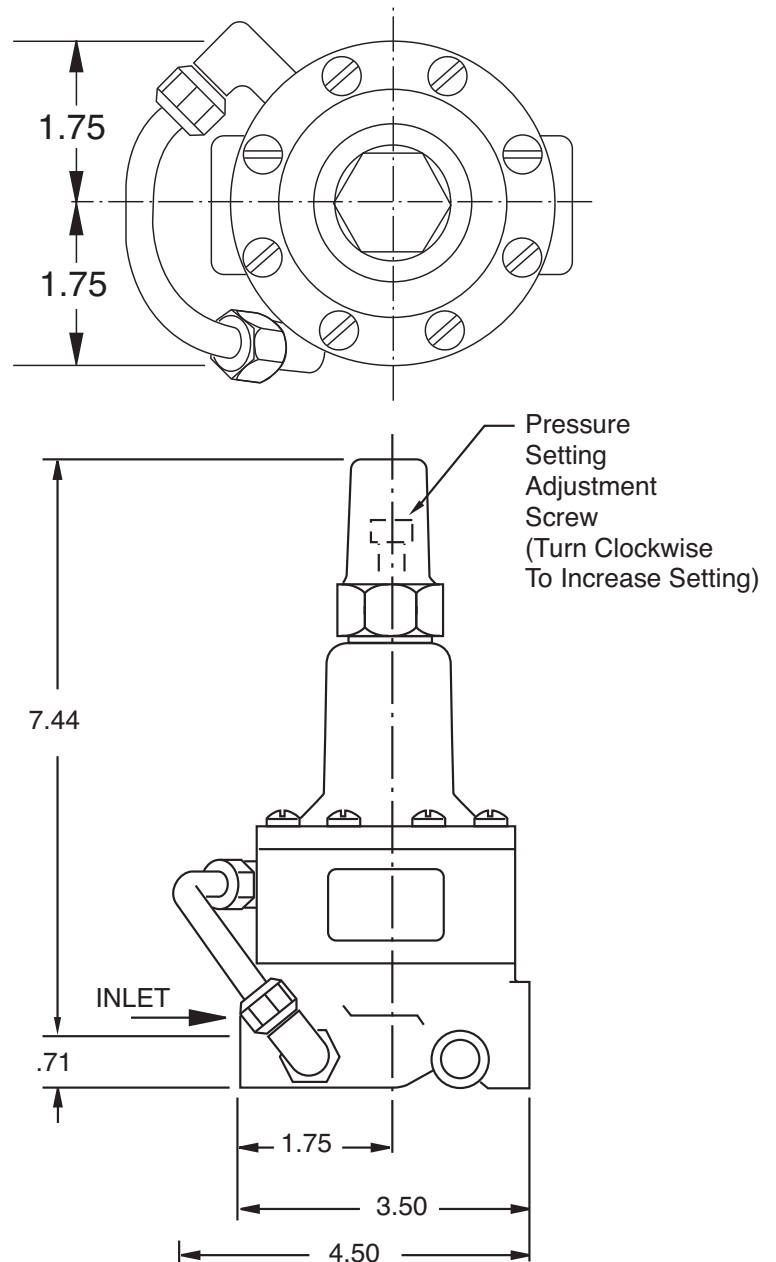

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.


SHOP ORDER:

CERTIFIED BY:

DATE:

CASING RELIEF VALVE

MODEL	R SERIES
SIZE	1" IN / OUT
CONNECTION	NPT
FLOW RANGE	3000-5000 GPM
PRESSURE RANGE	75-300 PSI
BODY & SEAT MATERIAL	BRONZE
VALVE MATERIAL	STAINLESS STEEL
MAX INLET PRESSURE	300 PSI
WEIGHT	3 LBS

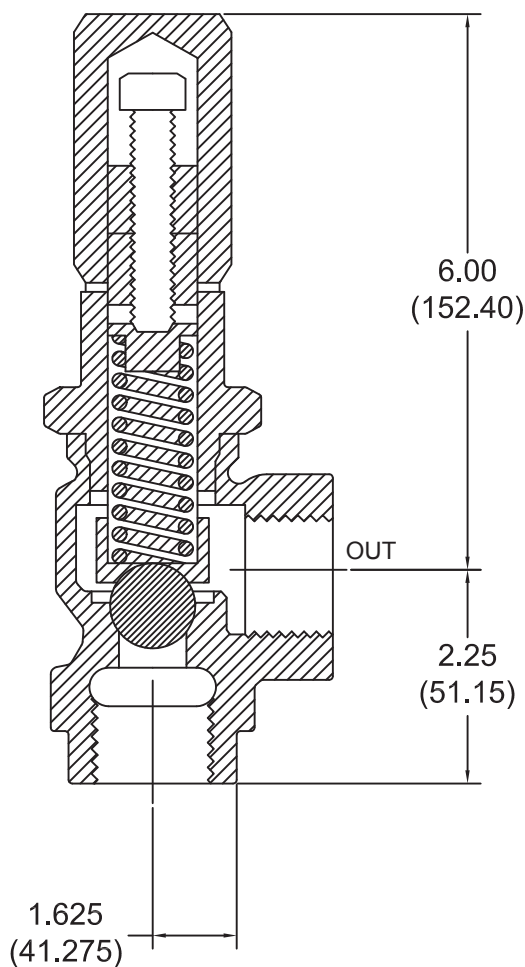

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:


CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	3"
CONNECTION	150# R.F. FLANGE
VALVE CONNECTIONS	(1) 2-1/2" NPT
MAX NFPA FLOW	300 GPM
BODY MATERIAL	FABRICATED STEEL
MAX W.P.	175 PSI
WEIGHT	15 LBS

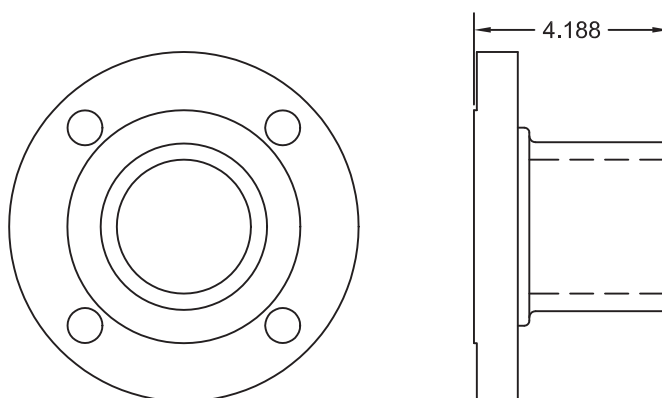

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:


CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	4"
CONNECTION	GROOVED
VALVE CONNECTIONS	(2) 2-1/2" NPT
MAX NFPA FLOW	500 GPM
BODY MATERIAL	CAST STEEL
	ASTM A216 GR. WCB
MAX W.P.	300 PSI
WEIGHT	15 LBS

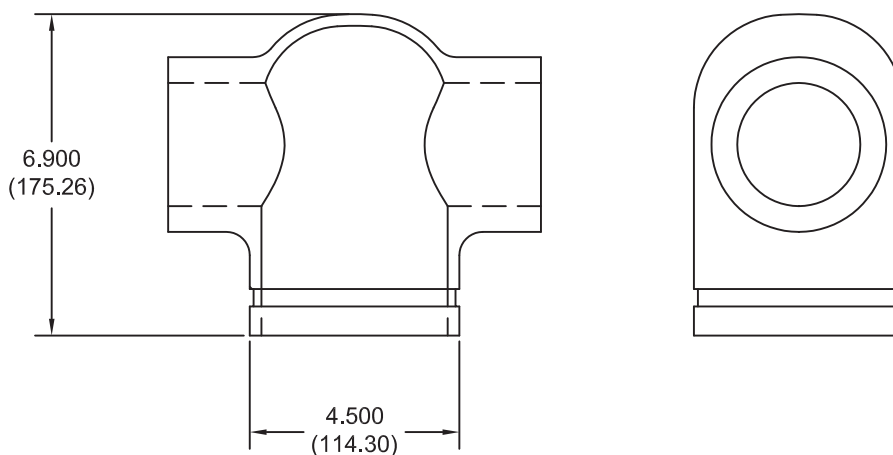

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:


CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	6"
CONNECTION	GROOVED
VALVE CONNECTIONS	(4) 2-1/2" NPT
MAX NFPA FLOW	1000 GPM
BODY MATERIAL	CAST STEEL
	ASTM A216 GR. WCB
MAX W.P.	300 PSI
WEIGHT	25 LBS


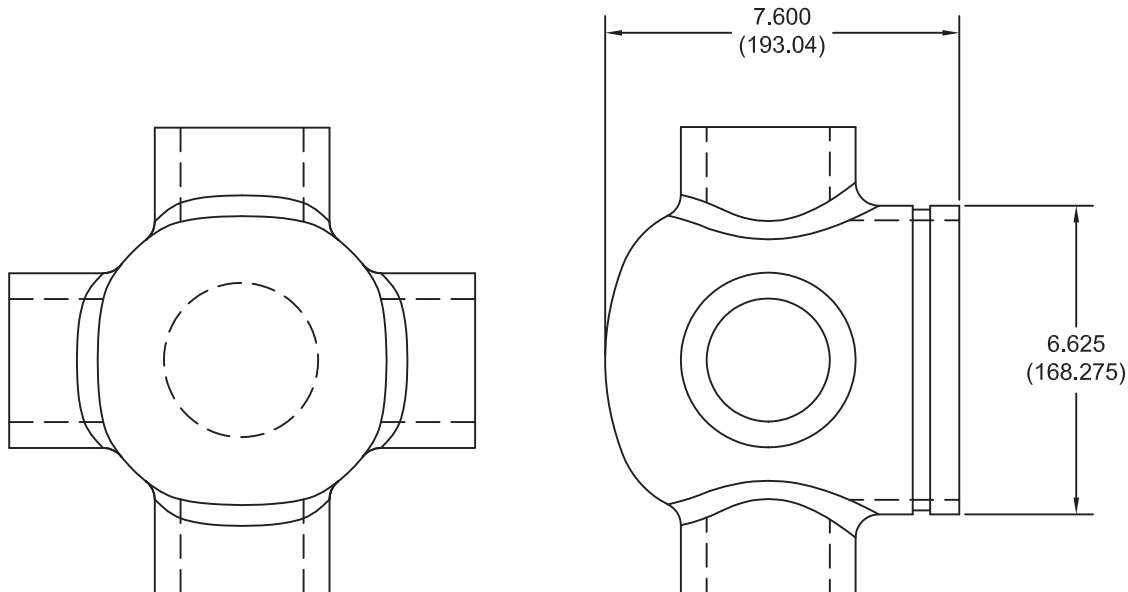


NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED		
CERTIFIED FOR:		
CUSTOMER ORDER NO.:	TAG NO.	
SHOP ORDER:	CERTIFIED BY:	DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	8"
CONNECTION	GROOVED
VALVE CONNECTIONS	(6) 2-1/2" NPT
MAX NFPA FLOW	2000 GPM
BODY MATERIAL	CAST STEEL
	ASTM A216 GR. WCB
MAX W.P.	300 PSI
WEIGHT	35 LBS

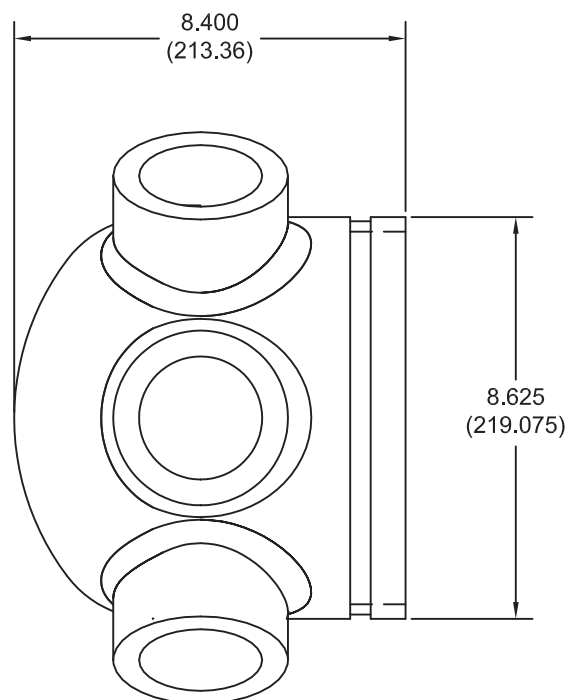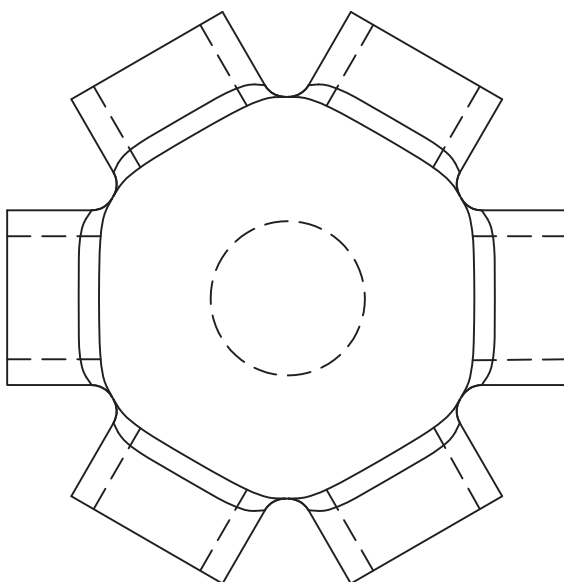

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:



CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	10"
CONNECTION	GROOVED
VALVE CONNECTIONS	(12) 2-1/2" NPT
MAX NFPA FLOW	3000 GPM
BODY MATERIAL	CAST STEEL
	ASTM A216 GR. WCB
MAX W.P.	300 PSI
WEIGHT	65 LBS

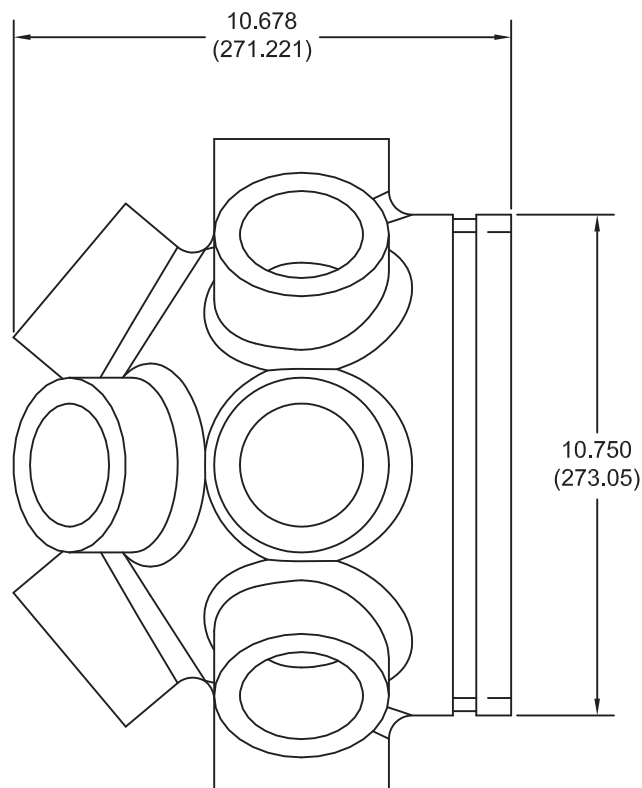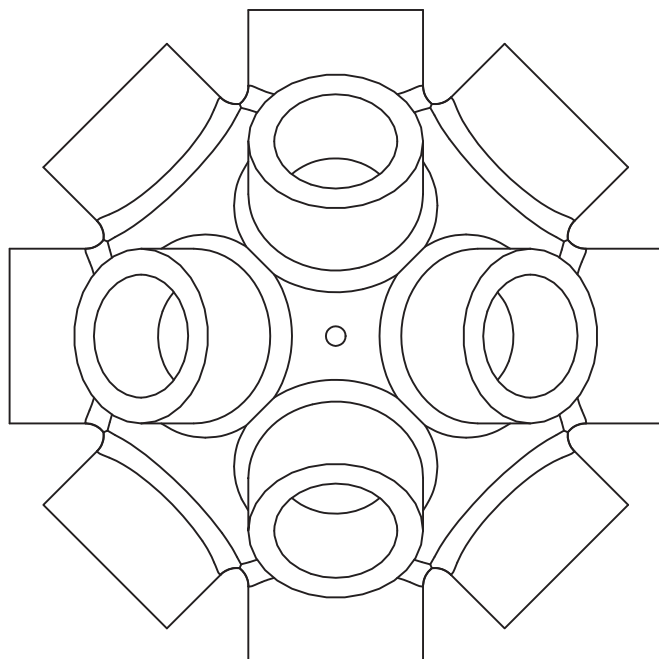

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:



CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	12"
CONNECTION	150# R.F.
VALVE CONNECTIONS	(12) 2-1/2" NPT
MAX NFPA FLOW	3500 GPM
BODY MATERIAL	FABRICATED STEEL
MAX W.P.	235 PSI
WEIGHT	134 LBS

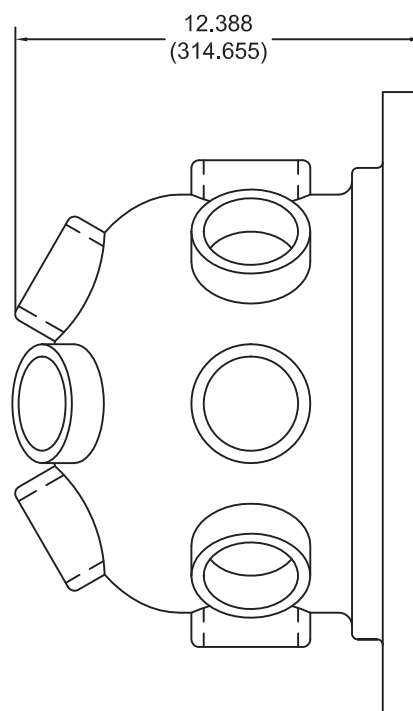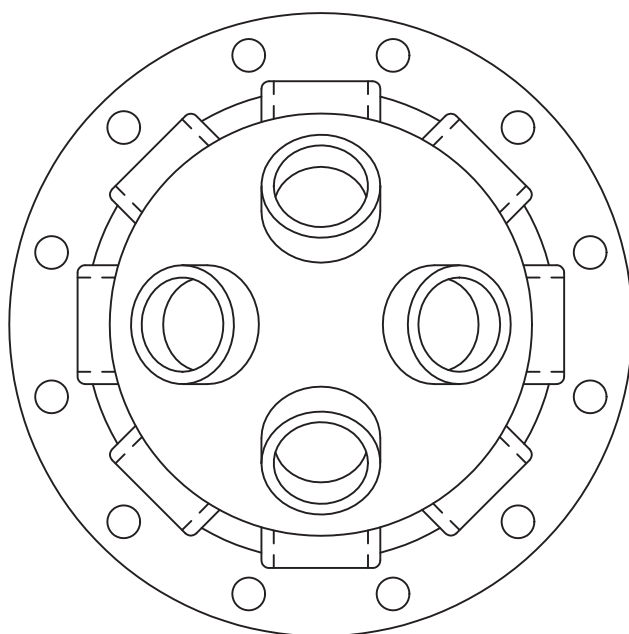

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:



CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	12"
CONNECTION	150# R.F.
VALVE CONNECTIONS	(16) 2-1/2" NPT
MAX NFPA FLOW	4500 GPM
BODY MATERIAL	FABRICATED STEEL
MAX W.P.	235 PSI
WEIGHT	162 LBS

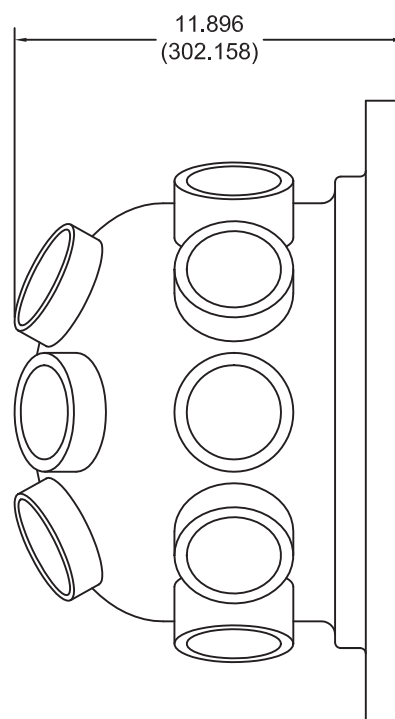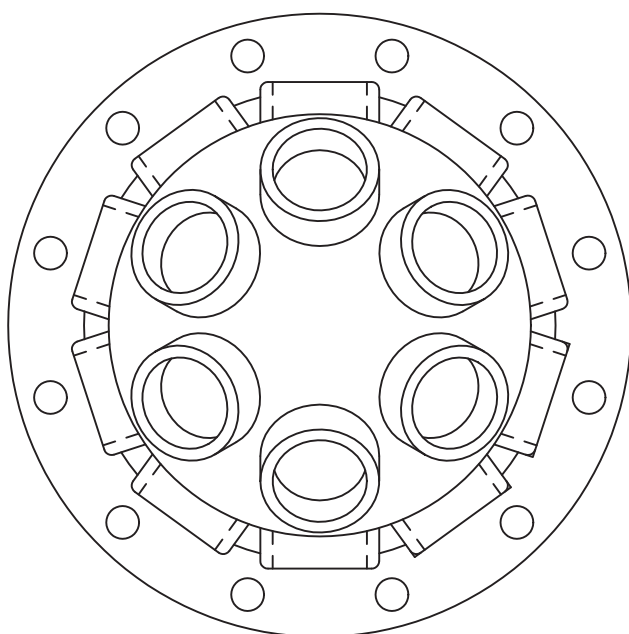**NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED**

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:


CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE HEADER

SIZE	12"
CONNECTION	150# R.F.
VALVE CONNECTIONS	(20) 2-1/2" NPT
MAX NFPA FLOW	5000 GPM
BODY MATERIAL	FABRICATED STEEL
MAX W.P.	235 PSI
WEIGHT	336 LBS

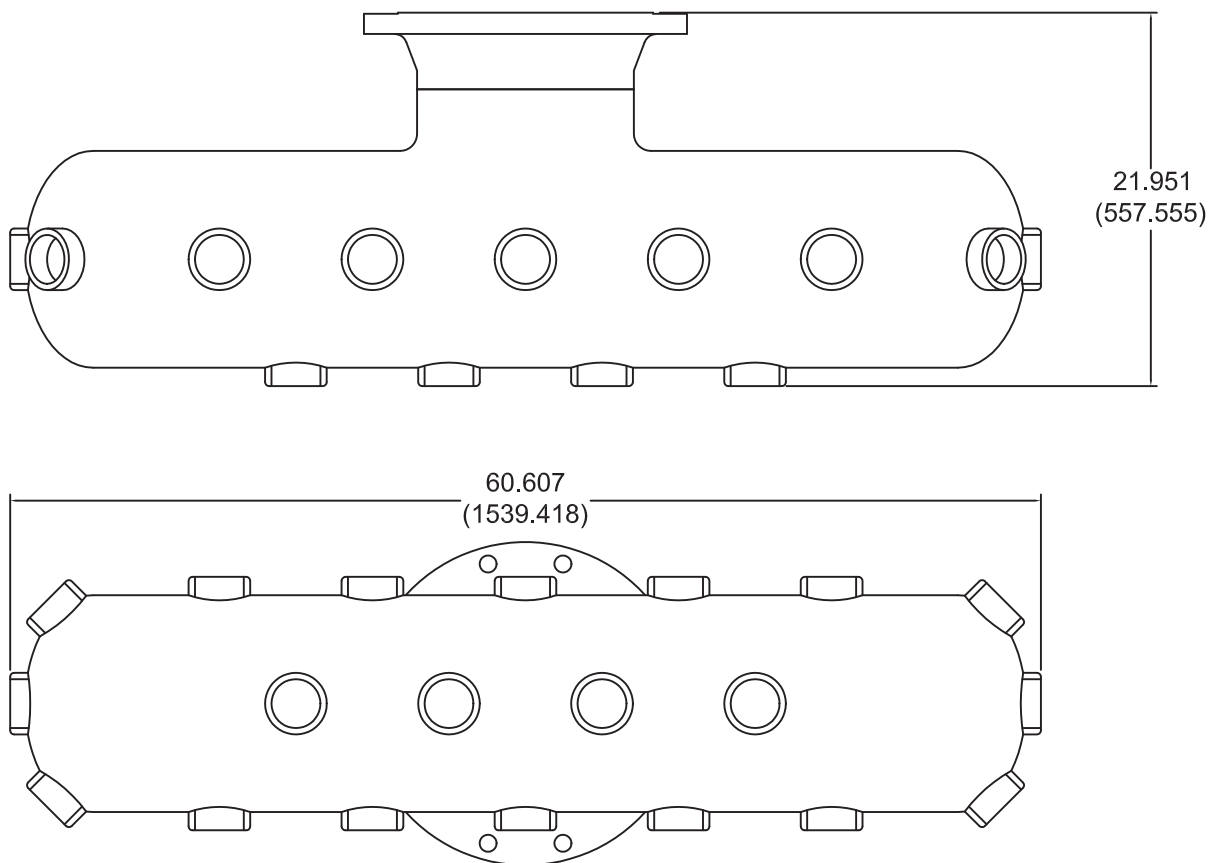

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:


CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

HOSE VALVE CAP & CHAIN

INLET	2-1/2" NPT
HOSE THREAD	2-1/2" NST (STD)
	OTHER _____
BODY MATERIAL	CAST BRASS
MAX W.P.	300 PSI
WEIGHT	20 LBS

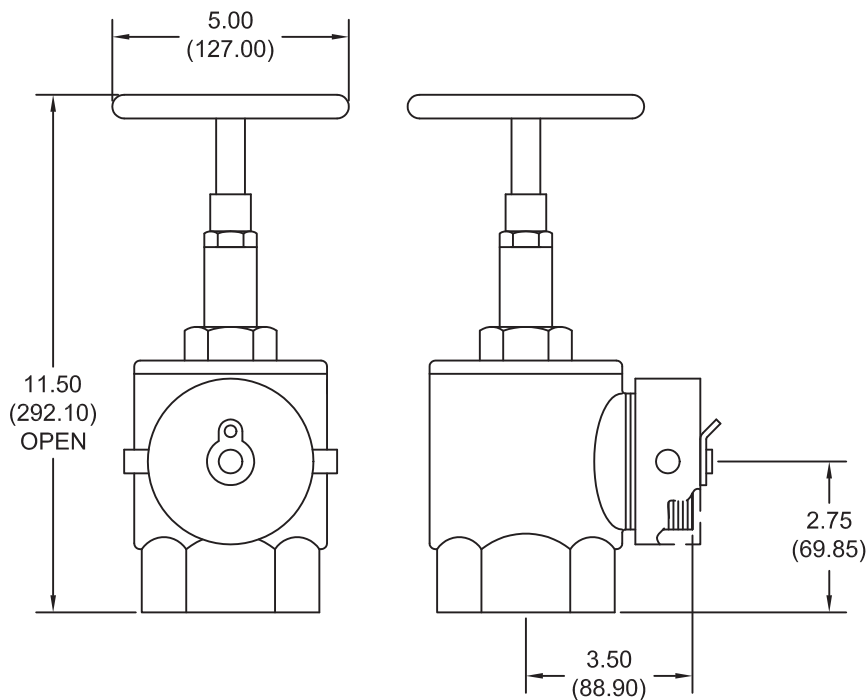

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

MAIN RELIEF VALVE

PILOT CONTROLLED

Sizes Angle 2" - 8" flanged

End Details 150 and 300 ANSI B16.42

Pressure Ratings Class 150 - (250 psi Max)
Class 300 - (300 psi Max)

Water, to 180°F Max.

Materials *Main Valve Body & Cover*

Ductile Iron ASTM A-536

Naval Bronze ASTM B61

Other Material Available

Standard Main Valve Trim:

Bronze Seat, Teflon Coated

Stainless Steel Stem, Delrin Sleeved

Standard Pilot Control System:

Cast Bronze with

Stainless Steel trim



Adjustment Range Available in the following relief
pressure ranges:

20-200 psi (150 Class)

100-300 psi (300 Class)

UL Listed / FM Approved (Sizes 3" - 8")

	2"	2-1/2"	3	4	6	8
WEIGHT (lbs)	50	50	80	130	210	270

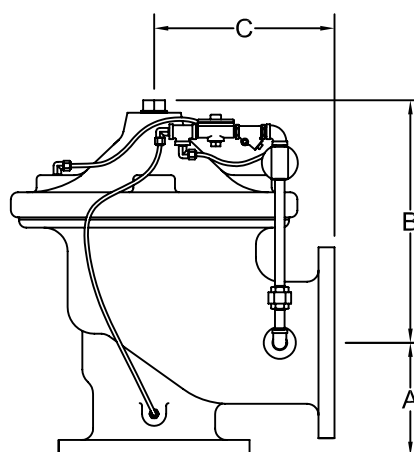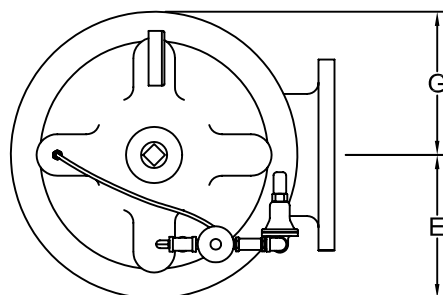

		VALVE SIZE (INCHES)					
		2	2 1/2	3	4	6	8
THREADED	A	3.250 (82.55)	4.000 (101.6)				
150# FLANGED		3.250 (82.55)	4.000 (101.6)	4.000 (101.6)	5.000 (127)	6.000 (152.4)	8.000 (203.2)
300# FLANGED		3.500 (88.9)	4.310 (109.474)	4.380 (111.252)	5.310 (134.874)	6.500 (165.1)	8.500 (215.9)
	B	12.000 (304.8)	12.250 (311.15)	12.500 (317.5)	13.000 (330.2)	14.310 (363.474)	16.310 (414.274)
THREADED	C	4.750 (120.65)	5.500 (139.7)				
150# FLANGED		4.750 (120.65)	5.500 (139.7)	6.000 (152.4)	7.500 (190.5)	10.000 (254)	12.750 (323.85)
300# FLANGED		5.000 (127)	5.880 (149.352)	6.380 (162.052)	7.880 (200.152)	10.500 (266.7)	13.250 (336.55)
	E	6.000 (152.4)	6.690 (169.926)	7.750 (196.85)	7.880 (200.152)	8.500 (215.9)	9.750 (247.65)
	G	3.310 (84.074)	4.000 (101.6)	4.560 (115.824)	5.750 (146.05)	7.880 (200.152)	10.000 (254)

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

MAIN RELIEF VALVE

SIZES

END DETAILS

MATERIALS

UL LISTED / FM APPROVED

ANGLE 3" – 6" FLANGED

125# / 125# ANSI B16.1

125# / 250# ANSI B16.1

-20°F TP 406°F


MAIN VALVE BODY & COVER

IRON, A126 CLASS A OR B

STANDARD MAIN VALVE TRIM

BRONZE DISC & INSERT

(SIZES 3" – 6")

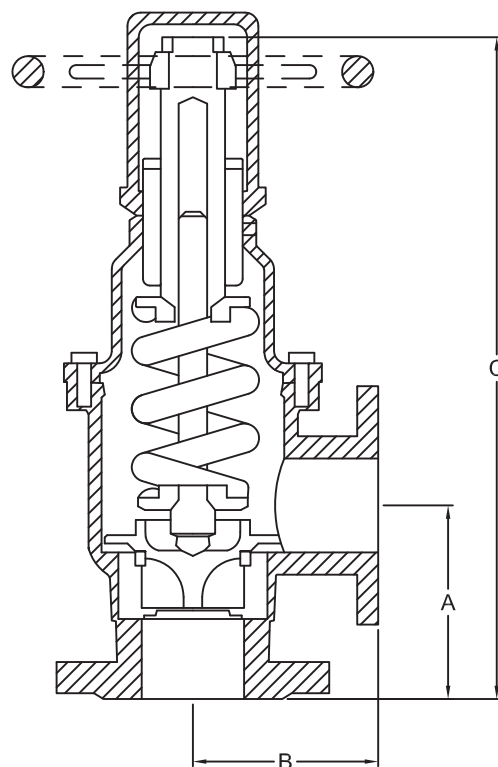

VALVE SIZE	INLET	OUTLET	A	B	C	MIN/MAX RANGE	APPROX WT
3x3	125# FLANGE	125# FLANGE	6.125 (155.575)	5.875 (149.225)	21.625 (549.275)	60/175	110
3x3	250# FLANGE		6.125 (155.575)	5.875 (149.225)	21.625 (549.275)	60/200	110
4x4	125# FLANGE		6.625 (168.275)	6.5 (165.1)	26 (660.4)	60/175	185
4x4	250# FLANGE		6.625 (168.275)	6.5 (165.1)	26 (660.4)	60/200	185
6x6	125# FLANGE		9.375 (238.125)	8.5 (215.9)	31 (787.4)	60/175	350
6x6	250# FLANGE		9.375 (238.125)	8.5 (215.9)	31 (787.4)	60/200	350

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:


CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

CLOSED WASTE CONE

INLET CONNECTION 150# R.F. ANSI B16.5
OUTLET CONNECTION 150# R.F. ANSI B16.5
BODY MATERIAL FABRICATED STEEL
MAX W.P. 175 PSI

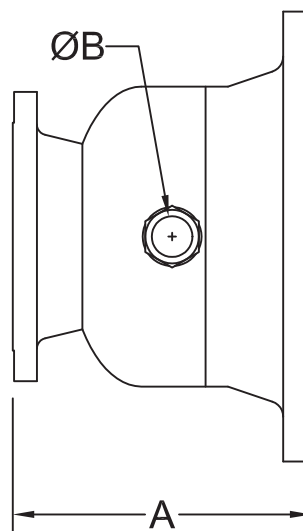

SIZE	A	B	WT
2 x 2-1/2	8.00 (203.2)	1.00 (25.4)	18
2-1/2 x 3-1/2	7.50 (190.5)	1.00 (25.4)	27
3 x 5	8.50 (215.9)	2.00 (50.8)	37
4 x 6	9.03 (229.362)	2.00 (50.8)	48
4 x 8	10.25 (260.35)	2.00 (50.8)	68
6 x 8	10.25 (260.35)	2.00 (50.8)	77
6 x 10	11.50 (292.1)	2.00 (50.8)	98
8 x 12	13.00 (330.2)	2.00 (50.8)	151
8 x 14	14.00 (355.6)	2.00 (50.8)	197

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.



SHOP ORDER:

CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

GERAND FLOWMETER

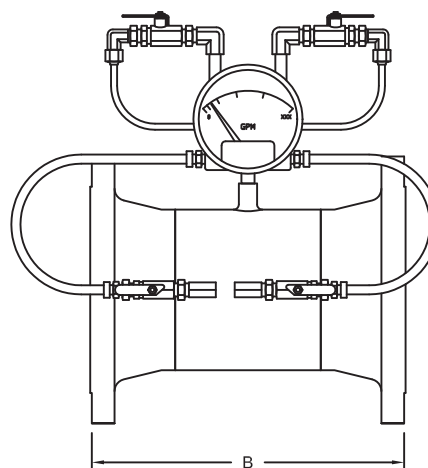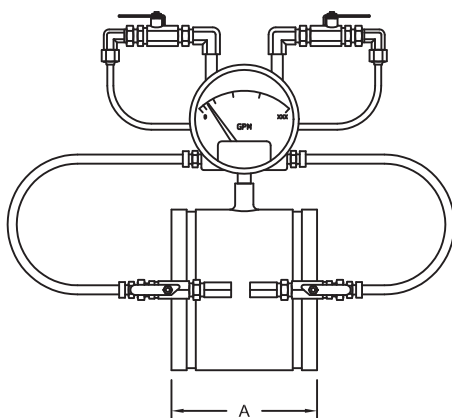

GPM	VENTURI SYSTEM MODEL NO.	PIPE SIZE	METER RANGE MIN. & MAX. GPM	A		B	
				VENTURI LENGTH		150 # (RF)	300 # (RF)
				GROOVED	BUTT WELD		
25	K-25-1-1/4(616)	1-1/4"	12.5-50	Threaded only 3-3/4 (92.25)		---	---
50	K-50-2(685)	2"	25-100	Threaded only 4-1/4 (120.65)		---	---
100	K-100-2-1/2(746)	2-1/2"	50-200	3.00 (76.2)	4.00 (101.6)	9.50 (241.3)	10.00 (254)
150	K-150-3(766)	3"	75-300	3.50 (88.9)	4.38 (111.125)	9.00 (228.6)	10.25 (260.35)
200	K-200-3(766)	3"	100-400	3.50 (88.9)	4.38 (111.125)	9.00 (228.6)	10.25 (260.35)
250	K-250-4(744)	4"	125-500	3.50 (88.9)	3.75 (95.25)	9.50 (241.3)	10.75 (273.05)
300	K-300-4(744)	4"	150-600	3.50 (88.9)	3.75 (95.25)	9.50 (241.3)	10.75 (273.05)
450	K-450-4(744)	4"	225-900	3.50 (88.9)	3.75 (95.25)	9.50 (241.3)	10.75 (273.05)
500	K-500-5(715)	5"	250-1000	5.00 (127)		12.00 (304.8)	13.25 (336.55)
500	K-500-6(743)	6"	250-1000	6.00 (152.4)		13.00 (330.2)	14.25 (361.95)
750	K-750-6(743)	6"	375-1500	6.00 (152.4)		13.00 (330.2)	14.25 (361.95)
1000	K-1000-6(743)	6"	500-2000	6.00 (152.4)		13.00 (330.2)	14.25 (361.95)
1250	K-1250-6(743)	6"	625-2500	6.00 (152.4)		13.00 (330.2)	14.25 (361.95)
1500	K-1500-8(750)	8"	750-3000	7.00 (177.8)		15.00 (381)	16.25 (412.75)
2000	K-2000-8(750)	8"	1000-4000	7.00 (177.8)		15.00 (381)	16.25 (412.75)
2500	K-2500-8(750)	8"	1250-5000	7.00 (177.8)		15.00 (381)	16.25 (412.75)
3000	K-3000-8(750)	8"	1500-6000	7.00 (177.8)		15.00 (381)	16.25 (412.75)
3500	K-3500-10(755)	10"	1750-7000	8.00 (203.2)		16.00 (406.4)	17.75 (450.85)
4000	K-4000-10(755)	10"	2000-8000	8.00 (203.2)		16.00 (406.4)	17.75 (450.85)
4500	K-4500-10(755)	10"	2250-9000	8.00 (203.2)		16.00 (406.4)	17.75 (450.85)
5000	K-2000-12(750)	12"	2500-9000	12.00 (304.8)		21.00 (533.4)	22.75 (577.85)

Factory Mutual Approved.

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:


DIMENSIONS IN INCHES (mm)

GVI FLOWMETER


CONSTRUCTION & SPECIFICATIONS

MATERIALS: MACHINED 1018 / 1026 CARBON STEEL
or CAST CARBON STEEL "WCB"
VALVES: 1/4" BRASS BALL
FLANGE OPT: 150# ANSI B 16.5
300# ANSI B 16.5
ID TAG: POLYCARBONATE


METER DATA




CONSTRUCTION: ALUMINUM BODY
OPERATION: DIAPHRAGM (BUNA CONVOLUTED)
ACCURACY: + 2% FULL SCALE
TEMPERATURE: 180°F / 80°C
PRESSURE: 500 PSIG - 3450 KPA
APPROX. WEIGHT: 3.75 LBS (1.7 KGS)
4" DIAL STANDARD - 6" DIAL AVAILABLE




BUTT WELD / GROOVED



BUTT WELD



GROOVED



FLANGED

GPM	MODEL NO.	PIPE SIZE	METER RANGE MIN. & MAX. GPM	LENGTH (DIM A)		
				BUTT WELD / GROOVED	150 # (RF)	300 # (RF)
25	1.25-25	1-1/4	12.5-50	4.875 (123.8)	4.250 (107.9)	10.000 (254)
50	2-50	2	25-100	5.000 (127)	3.220 (81.8)	N/A
100	50-200	2-1/2	50-200	4.000 (101.6)	9.250 (235)	10.000 (254)
150	3-150	3	75-300	4.000 (101.6)	9.375 (238.1)	10.250 (260.3)
200	3-200	3	100-400	4.000 (101.6)	9.375 (238.1)	10.250 (260.3)
250	4-250	4	125-500	5.375 (136.5)	11.375 (288.9)	12.125 (308)
300	4-300	4	150-600	5.375 (136.5)	11.375 (288.9)	12.125 (308)
400	4-400	4	200-800	5.375 (136.5)	11.375 (288.9)	12.125 (308)
450	4-450	4	225-900	5.375 (136.5)	11.375 (288.9)	12.125 (308)
450	5-450	5	225-900	6.000 (152.4)	13.000 (330.2)	13.750 (349.3)
500	5-500	5	250-1000	6.000 (152.4)	13.000 (330.2)	13.750 (349.3)
500	6-500	6	250-1000	7.000 (177.8)	14.000 (355.6)	14.750 (374.7)
750	5-750	5	375-1500	6.000 (152.4)	13.000 (330.2)	13.750 (349.3)
1000	6-1000	6	500-2000	7.000 (177.8)	14.000 (355.6)	14.750 (374.7)
1250	6-1250	6	625-2500	7.000 (177.8)	14.000 (355.6)	14.750 (374.7)
1500	8-1500	8	750-3000	7.250 (184.1)	15.250 (387.3)	16.000 (406.4)
2000	8-2000	8	1000-4000	7.250 (184.1)	15.250 (387.3)	16.000 (406.4)
2500	8-2500	8	1250-5000	7.250 (184.1)	15.250 (387.3)	16.000 (406.4)
3000	8-3000	8	1500-6000	7.250 (184.1)	15.250 (387.3)	16.000 (406.4)
3500	10-3500	10	1750-7000	8.000 (203.2)	16.000 (406.4)	17.250 (438.1)
4000	10-4000	10	2000-8000	8.000 (203.2)	16.000 (406.4)	17.250 (438.1)
4500	10-4500	10	2250-9000	8.000 (203.2)	16.000 (406.4)	17.250 (438.1)
5000	12-5000	12	2500-10000	12.000 (304.8)	21.000 (533.4)	22.250 (565.2)

Factory Mutual Approved.

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

DIMENSIONS IN INCHES (mm)

SINGLE WALL FUEL TANK


TYPE: ABOVE GROUND HORIZONTAL
APPROVALS: UL 142
MATERIAL: MILD CARBON STEEL
TEST PRESSURE: 3-5 PSI
PAINT: EXTERIOR ONLY TNEMEC N69 CRAWFORD RED

TANK SIZE (GALLONS)	D	F	G	L	M	W	WEIGHT LB.
61	20.00	1.88	9.00	45.00	27.00	12.00	150
70	24.00	2.50	6.00	36.00	24.00	16.88	155
119	24.00	2.38	8.50	61.00	44.00	14.00	265
140	24.00	2.75	15.00	72.00	42.00	17.50	275
187	30.00	3.00	8.50	61.00	44.00	16.00	330
200	32.00	3.25	15.00	60.00	44.00	22.63	350
231	34.00	3.38	7.50	59.00	44.00	23.00	370
250	32.00	3.25	15.00	72.00	42.00	22.63	390
300	38.00	3.75	8.50	61.00	44.00	23.00	400
359	38.00	3.75	14.50	73.00	44.00	23.00	460
460	48.00	4.75	15.00	60.00	44.00	34.00	550
572	48.00	4.75	14.50	73.00	44.00	30.00	590
650	52.00	5.25	17.75	71.00	44.00	30.00	640
704	60.00	5.88	7.00	58.00	44.00	30.00	750
849	64.00	6.25	8.50	61.00	44.00	30.00	1000
978	64.00	6.25	13.00	70.00	44.00	30.00	1250

NOTES

- ITEMS DISPLAYED IN PHANTOM LINES FURNISHED BY OTHERS TO CONFORM TO INDIVIDUAL JOB REQUIREMENTS.
- LOCATE TANK OUTLET LEVEL OR ABOVE THE ENGINE FUEL PUMP CENTERLINE.
- INSTALL TANK IN ACCORDANCE WITH REQUIREMENTS OF LOCAL CODES AND STADNARS. ARRANGE TANK AS CLOSE TO ENGINE AS POSSIBLE.
- PITCH TANK TOWARDS DRAIN .25" PER FOOT.
- FOR PROPER FUEL SUPPLY AND RETURN SIZE SEE ENGINE MANUFACTURER'S RECOMMENDATIONS.
- PER LATEST EDITION OF NFPA 20 ALL TANK VENTS SHALL TERMINATE 5' FROM ANY BUILDING OPENING AND 12' FROM GROUND LEVEL.

ITEM	QTY	DESCRIPTION
1	1	FILL CAP WITH PROVISIONS FOR PADLOCK COMBINED WITH REMOVABLE STRAINER MAX .06 MESH, 2" NPT
2	1	DOUBLE TAP BUSHING, 3" x 2" NPT
3	1	VENT CAP W/ INSECT SCREEN, 2" NPT
4	1	DIRECT READING TANK GAUGE, 2" NPT
5	1	PIPE PLUG, 1" NPT
6	1	PIPE TEE, 2" x 2" x .5" NPT
7	1	BALL VALVE, .75" NPT WITH PROVISION FOR PADLOCK
8	1	DOUBLE TAP BUSHING, 1.5" x .5" NPT
9	1	EMERGENCY RELIEF VENT, 4" NPT

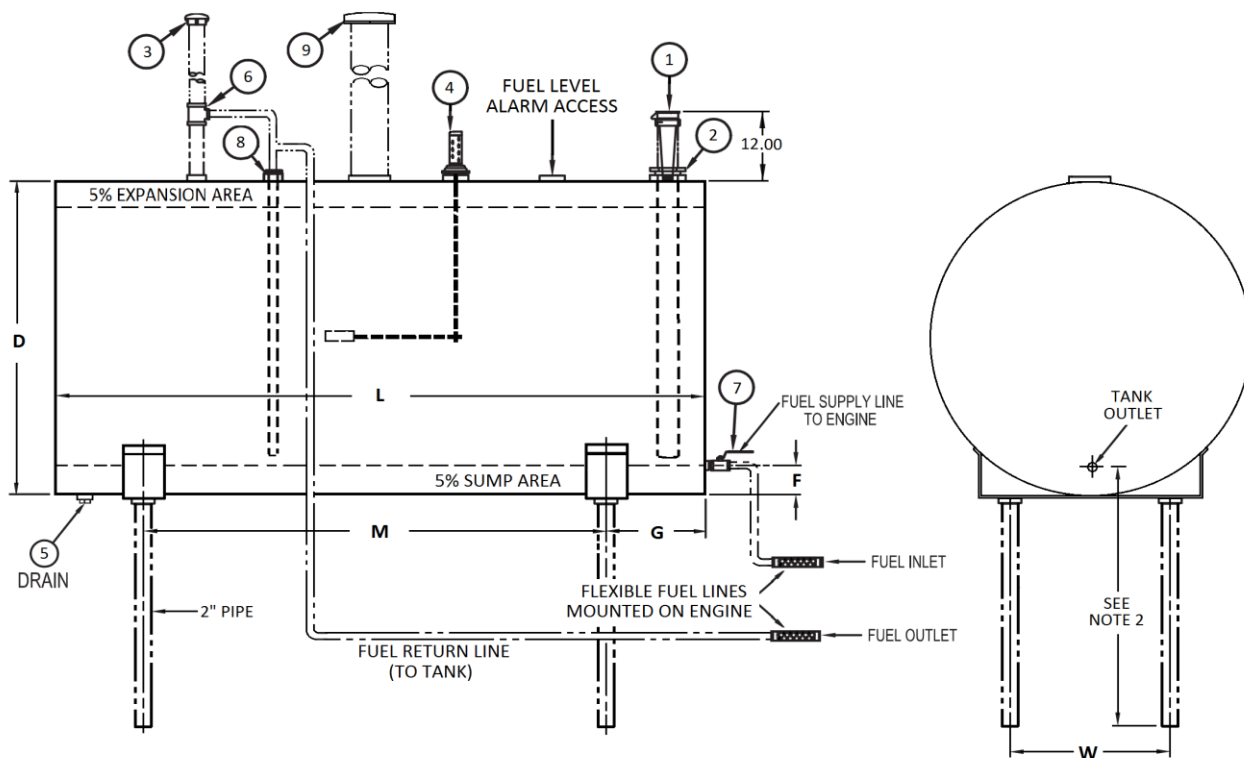

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

DOUBLE WALL FUEL TANK


TYPE: ABOVE GROUND HORIZONTAL
APPROVALS: UL 142
MATERIAL: MILD CARBON STEEL
TEST PRESSURE: 3-5 PSI
PAINT: EXTERIOR ONLY TNMEC N69 CRAWFORD RED

TANK SIZE (GALLONS)	D	F	G	L	M	W	WEIGHT LB.
61	21.00	3.00	9.00	56.00	27.00	12.00	200
70	25.00	3.63	6.00	47.00	24.00	16.88	205
119	25.00	3.20	8.50	72.00	44.00	14.00	300
140	25.00	3.88	15.00	83.00	42.00	17.50	350
187	31.00	4.13	8.50	72.00	44.00	16.00	455
200	33.00	4.51	8.00	71.00	44.00	22.62	410
231	35.00	3.87	7.50	70.00	44.00	23.00	550
250	33.00	4.38	15.00	83.00	42.00	22.62	575
300	39.00	4.88	8.50	72.00	44.00	23.00	7501
359	39.00	4.88	14.50	84.00	44.00	23.00	825
460	49.00	5.88	8.00	71.00	44.00	34.00	965
572	49.00	5.88	14.50	84.00	44.00	30.00	1000
650	53.00	6.38	17.75	82.00	44.00	30.00	1150
704	61.00	7.00	7.00	69.00	44.00	30.00	1300
849	65.00	7.38	8.50	72.00	44.00	30.00	1700
968	65.00	7.38	13.00	81.00	44.00	30.00	1800

NOTES

- ITEMS DISPLAYED IN PHANTOM LINES FURNISHED BY OTHERS TO CONFORM TO INDIVIDUAL JOB REQUIREMENTS.
- LOCATE TANK OUTLET LEVEL OR ABOVE THE ENGINE FUEL PUMP CENTERLINE.
- INSTALL TANK IN ACCORDANCE WITH REQUIREMENTS OF LOCAL CODES AND STADNARS. ARRANGE TANK AS CLOSE TO ENGINE AS POSSIBLE.
- PITCH TANK TOWARDS DRAIN .25" PER FOOT.
- FOR PROPER FUEL SUPPLY AND RETURN SIZE SEE ENGINE MANUFACTURER'S RECOMENDATIONS.
- PER LATEST EDITION OF NFPA 20 ALL TANK VENTS SHALL TERMINATE 5' FROM ANY BUILDING OPENING AND 12' FROM GROUND LEVEL.

ITEM	QTY	DESCRIPTION
1	1	FILL CAP WITH PROVISIONS FOR PADLOCK COMBINED WITH REMOVABLE STRAINER MAX .06 MESH, 2" NPT
2	1	DOUBLE TAP BUSHING, 3" x 2" NPT
3	1	VENT CAP W/ INSECT SCREEN, 2" NPT
4	1	DIRECT READING TANK GAUGE, 2" NPT
5	2	PIPE PLUG, 1" NPT
6	1	PIPE TEE, 2" x 2" x .5" NPT
7	1	BALL VALVE, .75" NPT WITH PROVISION FOR PADLOCK
8	1	DOUBLE TAP BUSHING, 1.5" x .5" NPT
9	2	EMERGENCY RELIEF VENT, 4" NPT
10	1	PIPE PLUG, 2" NPT

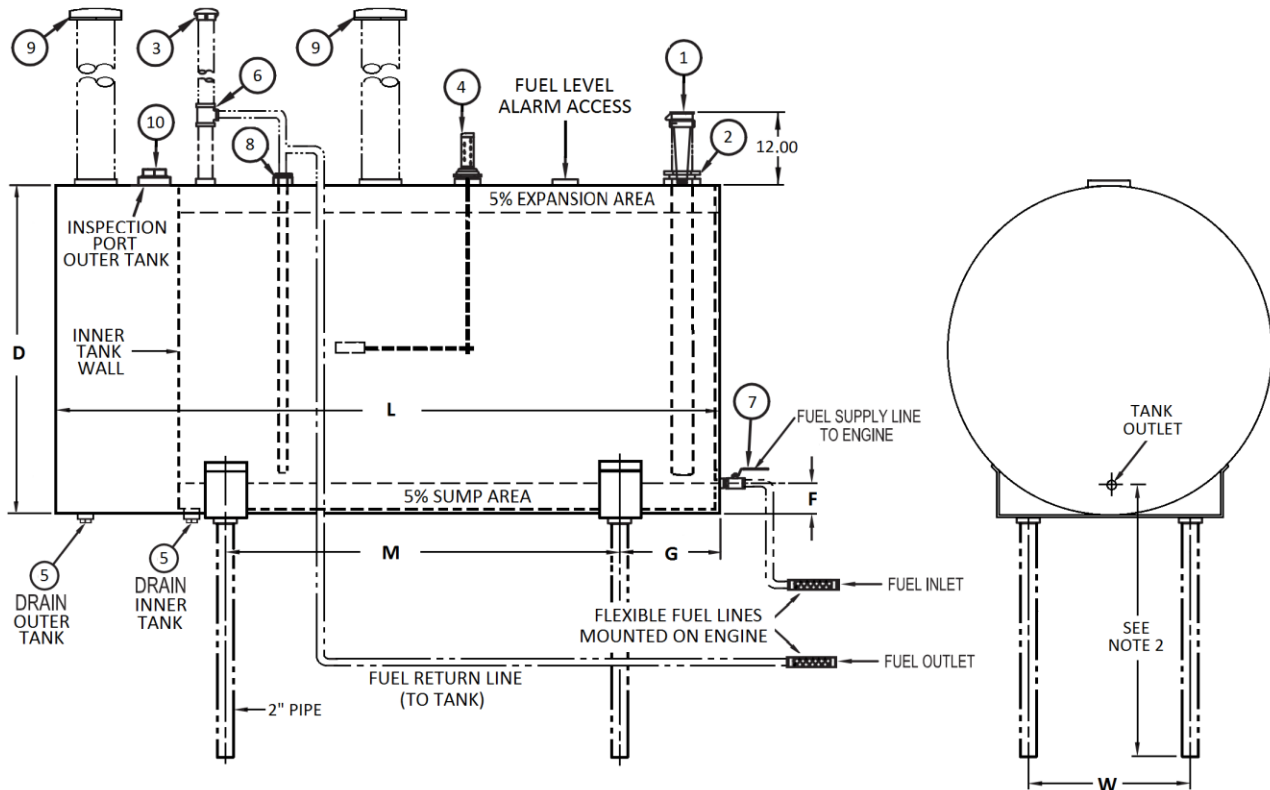

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED

CERTIFIED FOR:

CUSTOMER ORDER NO.:

TAG NO.

SHOP ORDER:

CERTIFIED BY:

DATE:

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating advanced technology solutions to the world's water challenges. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. Our products and services move, treat, analyze, monitor and return water to the environment, in public utility, industrial, residential and commercial building services settings. Xylem also provides a leading portfolio of smart metering, network technologies and advanced analytics solutions for water, electric and gas utilities. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise with a strong focus on developing comprehensive, sustainable solutions.

For more information on how Xylem can help you, go to www.xyleminc.com



Xylem Inc.
8200 N. Austin Avenue
Morton Grove, Illinois 60053
Phone: (847) 966-3700
Fax: (847) 965-8379
www.acfirepump.com

A-C Fire Pump is a trademark of Xylem Inc. or one of its subsidiaries.
© 2023 Xylem Inc. AC-100F November 2023