


# e-1531X Smart Pump

powered by hydrovar® X

## Example Product Code

The various versions of the e-1531X line are identified by a product code number. This number is also the catalog number for the pump. The meaning of each digit in the product code number is shown below. NOTE: Not all combinations are possible.

1531X	A	1	M	5	S	X	1
-------	---	---	---	---	---	---	---

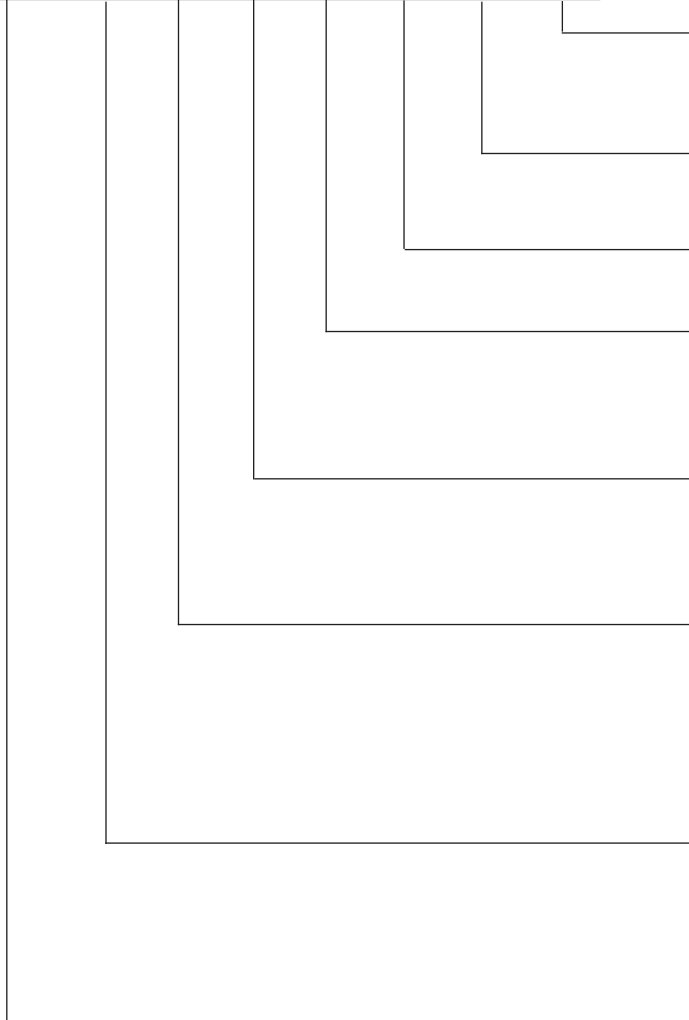

### Seal Material

- (1) = BUNA/C/SC
- (2) = EPR SIC/SIC

### Motor/Drive

- (X) = hydrovar X+(High Tier)

### Voltage

- (R) = 200-240V (S) = 380-460V (3-phase only)

### Pole-Hz-Phase

- (4) = 4-60-3 (2000-4000RPM)\*
- (5) = 4-60-3 (1200-2000RPM)\*

\* The frequency (Hz) listed is the supply frequency.

### HP Rating

- (J) = 3                      (R) = 10                      (P) = 25
- (K) = 5.5                      (M) = 15                      (Q) = 30
- (L) = 7.5                      (N) = 20

### Pump Size

- (1) = AD-7"                      (5) = BD-9.5"                      (10) = GC-13.5"
- (2) = AC-7"                      (6) = EB-11"
- (3) = A-7"                      (7) = G-13.5"
- (11) = BB-9.5"                      (8) = E-11"
- (4) = BC-9.5"                      (9) = GB -13.5"

### Discharge Size

- (A) = 1.25"                      (E) = 3"
- (B) = 1.5"                      (F) = 4"
- (C) = 2"                      (G) = 5"
- (D) = 2.5"                      (H) = 6"

### Pump Series

- (1510X) = e-1510 with hydrovar X/X+ technology
- (1531X) = e-1531 with hydrovar X/X+ technology
- (1532X) = e-1532\*\* with hydrovar X/X+ technology

\*\*No baseplate

### Xylem Product Cybersecurity:

Xylem values your system security and the availability of your critical services. For more information on Xylem cybersecurity practices or to contact the cybersecurity team please visit [xylem.com/security](http://xylem.com/security).

Learn more about  
e-1531X & e-1532X  
Smart Pumps

