


e-1532X Smart Pump

powered by hydrovar® X

Example Product Code

The various versions of the e-1532X line are identified by a product code number. This number is also the catalog number for the pump. The meaning of each digit in the product code number is shown below. NOTE: Not all combinations are possible.

1532X	A	1	M	5	S	X	1
-------	---	---	---	---	---	---	---

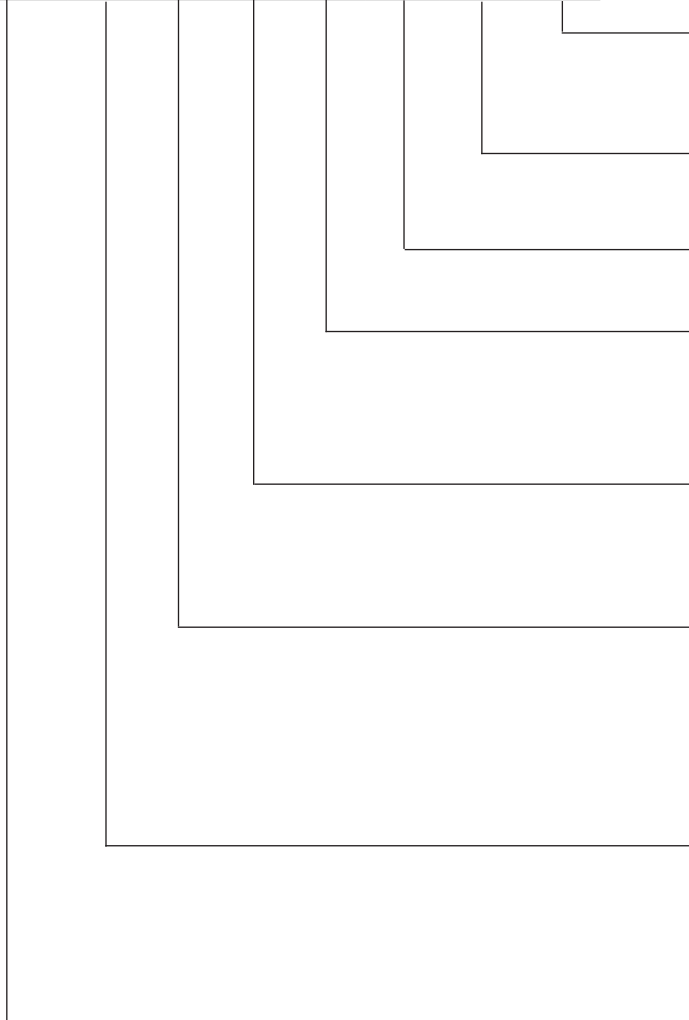

Seal Material

- (1) = BUNA/C/SC
- (2) = EPR SIC/SIC

Motor/Drive

- (X) = hydrovar X+(High Tier)

Voltage

- (R) = 200-240V (S) = 380-460V (3-phase only)

Pole-Hz-Phase

- (4) = 4-60-3 (2000-4000RPM)*
- (5) = 4-60-3 (1200-2000RPM)*

* The frequency (Hz) listed is the supply frequency.

HP Rating

- (J) = 3 (R) = 10 (P) = 25
- (K) = 5.5 (M) = 15 (Q) = 30
- (L) = 7.5 (N) = 20

Pump Size

- (1) = AD-7" (5) = BD-9.5" (10) = GC-13.5"
- (2) = AC-7" (6) = EB-11"
- (3) = A-7" (7) = G-13.5"
- (11) = BB-9.5" (8) = E-11"
- (4) = BC-9.5" (9) = GB -13.5"

Discharge Size

- (A) = 1.25" (E) = 3"
- (B) = 1.5" (F) = 4"
- (C) = 2" (G) = 5"
- (D) = 2.5" (H) = 6"

Pump Series

- (1510X) = e-1510 with hydrovar X/X+ technology
- (1531X) = e-1531 with hydrovar X/X+ technology
- (1532X) = e-1532** with hydrovar X/X+ technology

**No baseplate

Xylem Product Cybersecurity:

Xylem values your system security and the availability of your critical services. For more information on Xylem cybersecurity practices or to contact the cybersecurity team please visit xylem.com/security.

Learn more about
e-1531X & e-1532X
Smart Pumps

