

Quick Startup Guide







e-SHE, e-SHS hydrovar X Series


Electric pumps with integrated variable speed drive

ESHEX

ESHSX



Torx



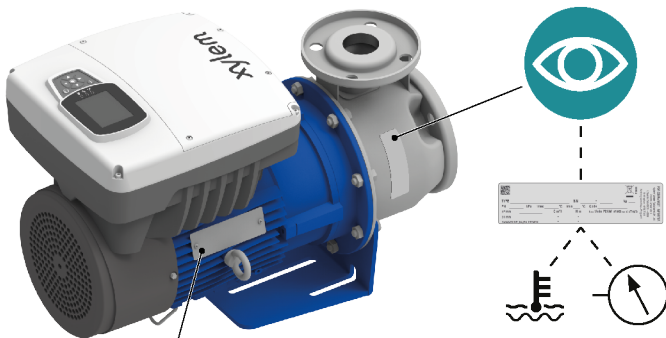


% <50% @ 40°C (104°F)




1



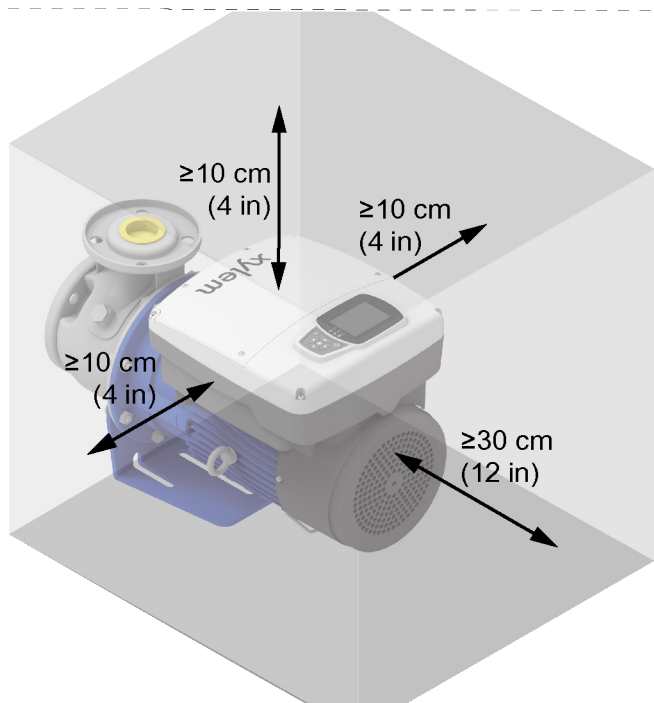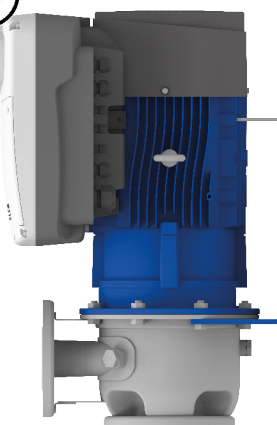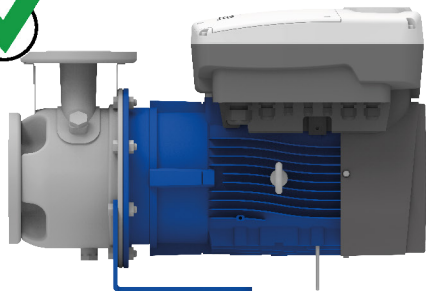


2

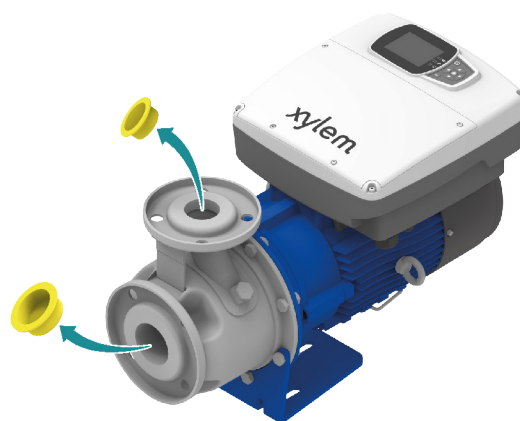


3


SHEX

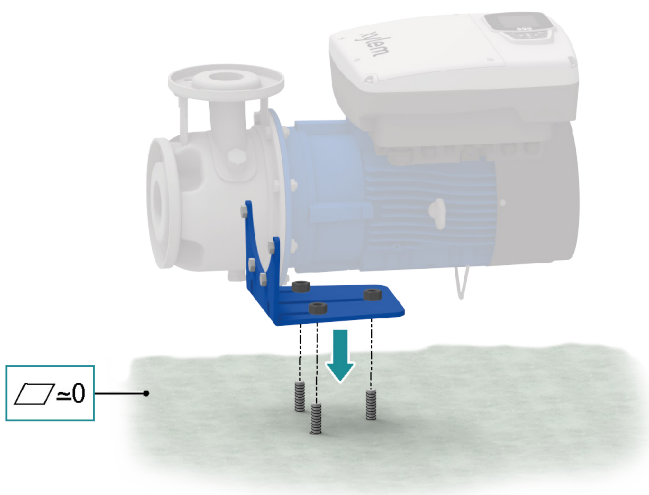


SHSX

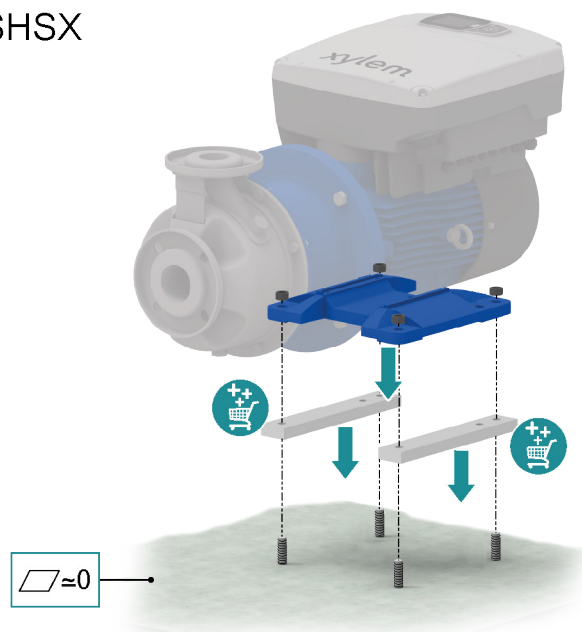

4

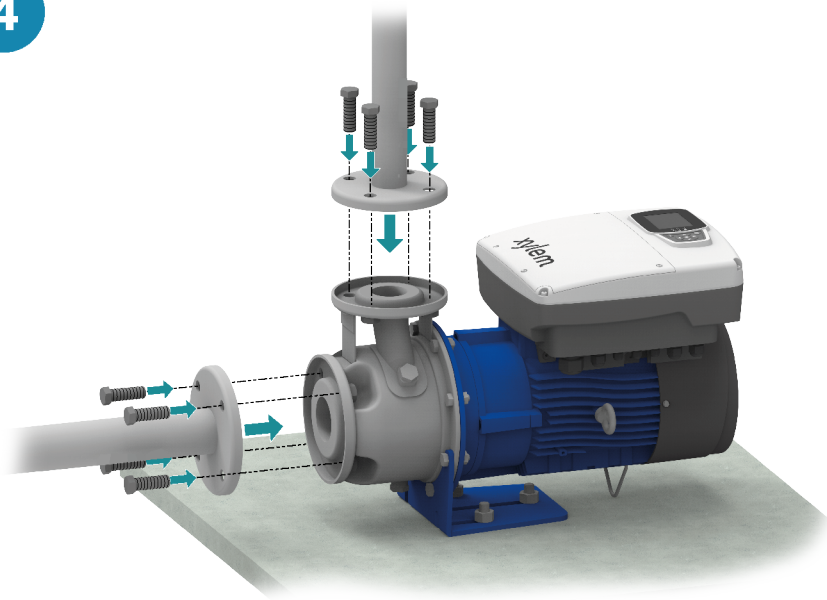

i

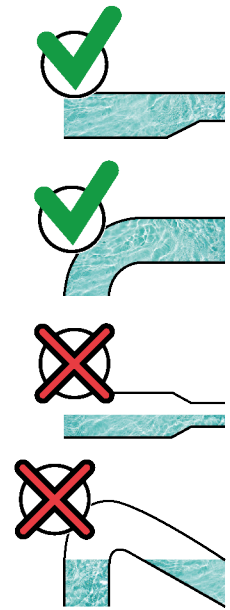

5



6




$P = P_{START} - 0.3 \text{ bar (4.3 psi)}$




7



8

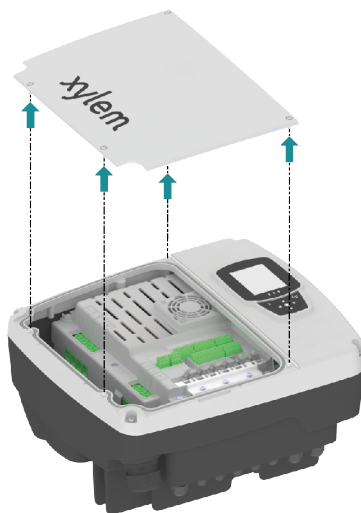

9

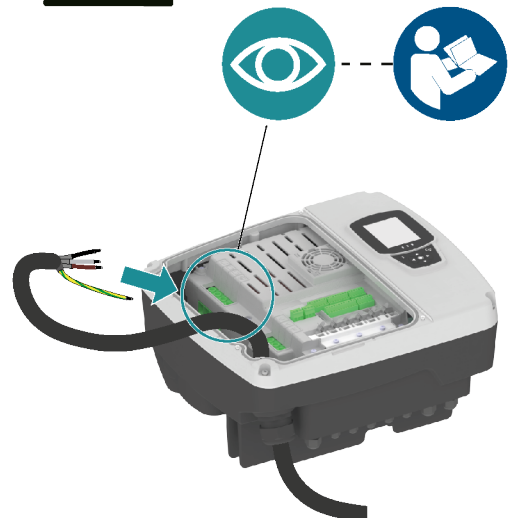


10




11





3 Nm
(27 lbf-in)
±15%

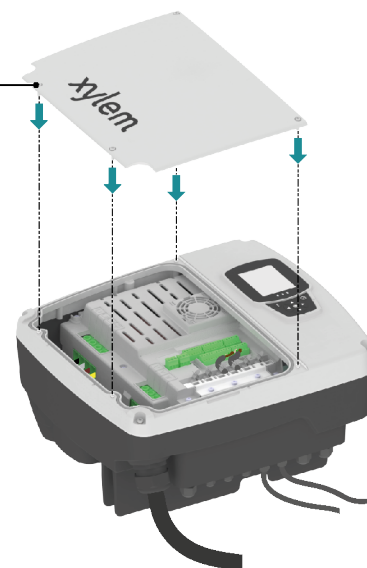



12

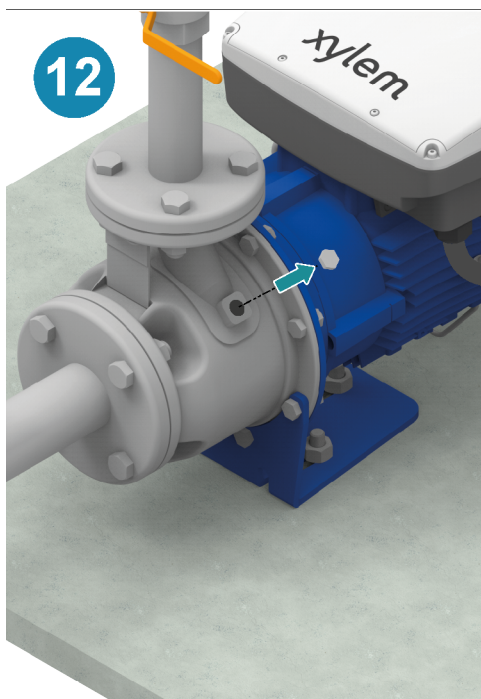


13

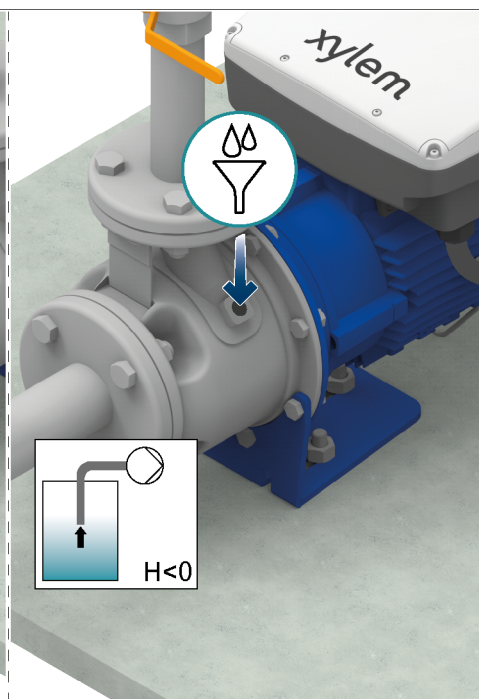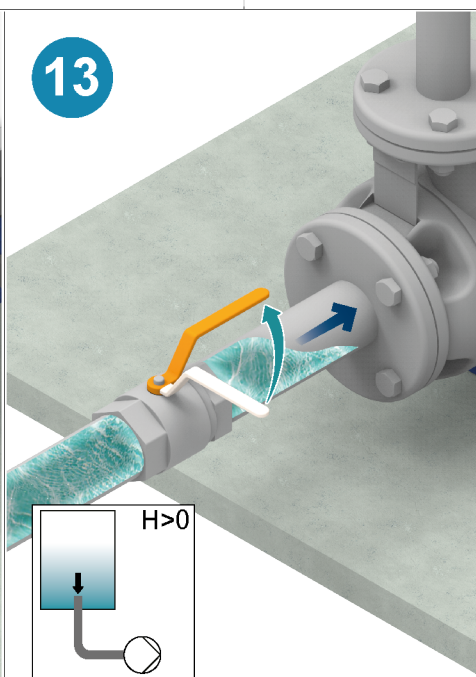

14

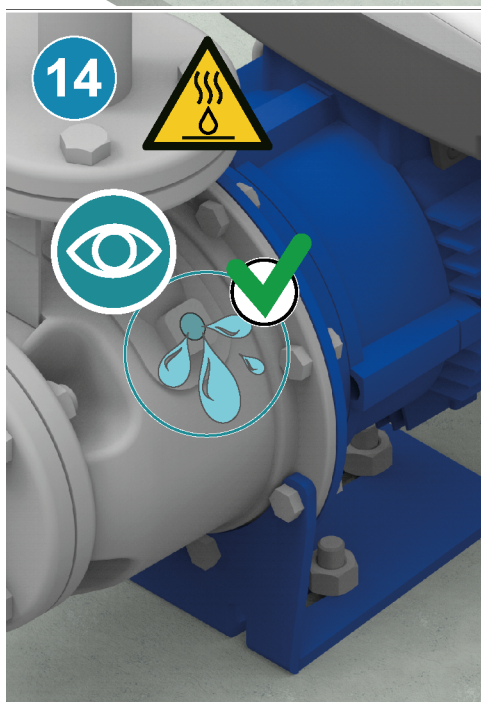




15

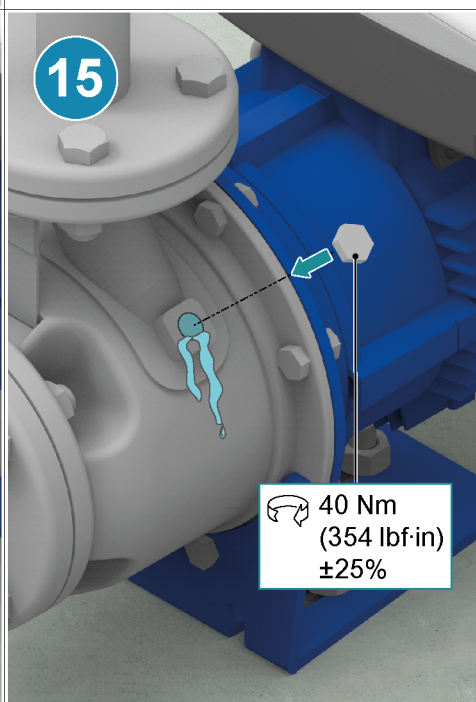

40 Nm
(354 lbf-in)
±25%

16

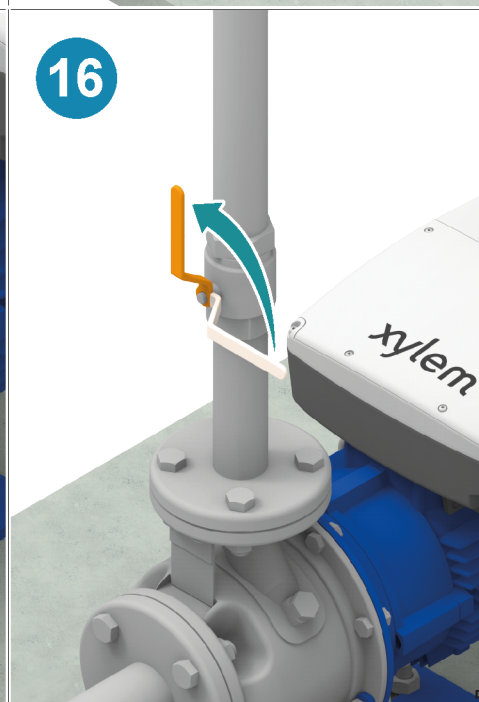

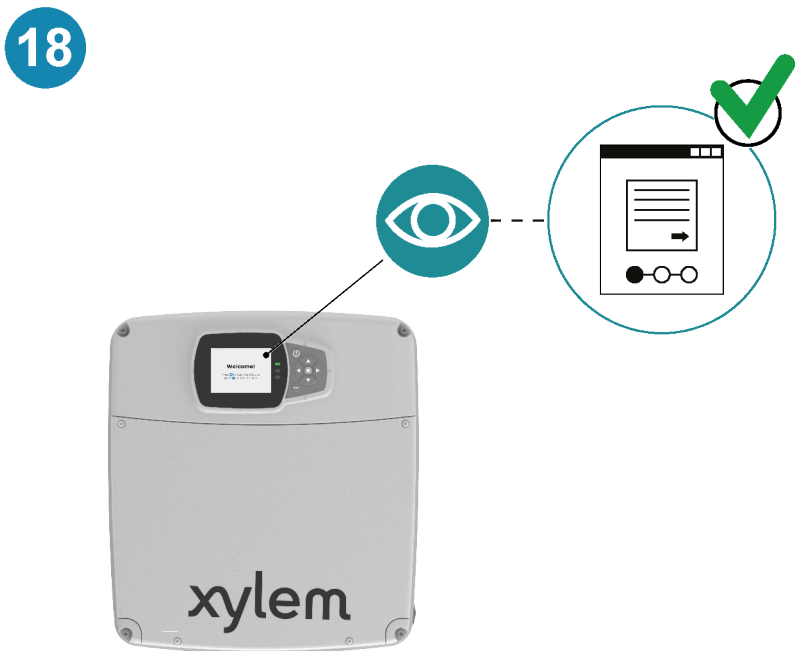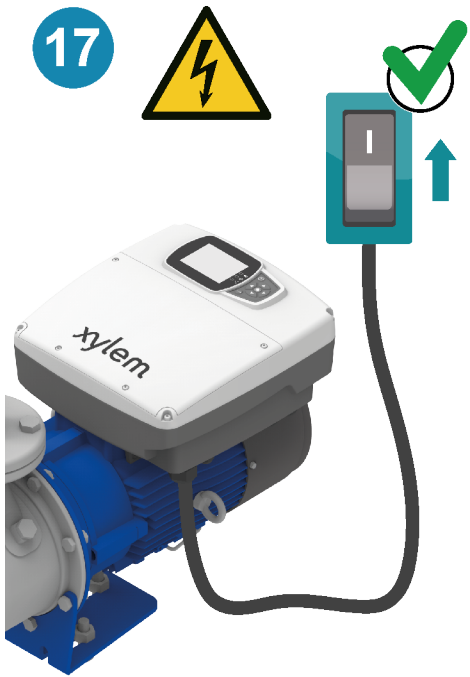



Xylem Service Italia S.r.l.
Via Vittorio Lombardi 14
36075 - Montecchio Maggiore (VI) - Italy

xylem.com/lowara
Visit our Web site for the latest version of this document and more information
© 2024 Xylem Inc
Cod.001087045 rev.B ed.02/2025